


SPECIFICATIONS

DN	DN50~300
PN (MPa)	1.6
SUITABLE TEMP °C	-10~200
MEDIUM	WATER,OIL,STEAM
TEST PRESSURE MPa	SHELL (WATER) 2.4

TECHNICAL REQUIREMENTS

- 1.FACE TO FACE : DIN3202-F1 ;
- 2.FLANGE : BS EN1092-2:1997 .

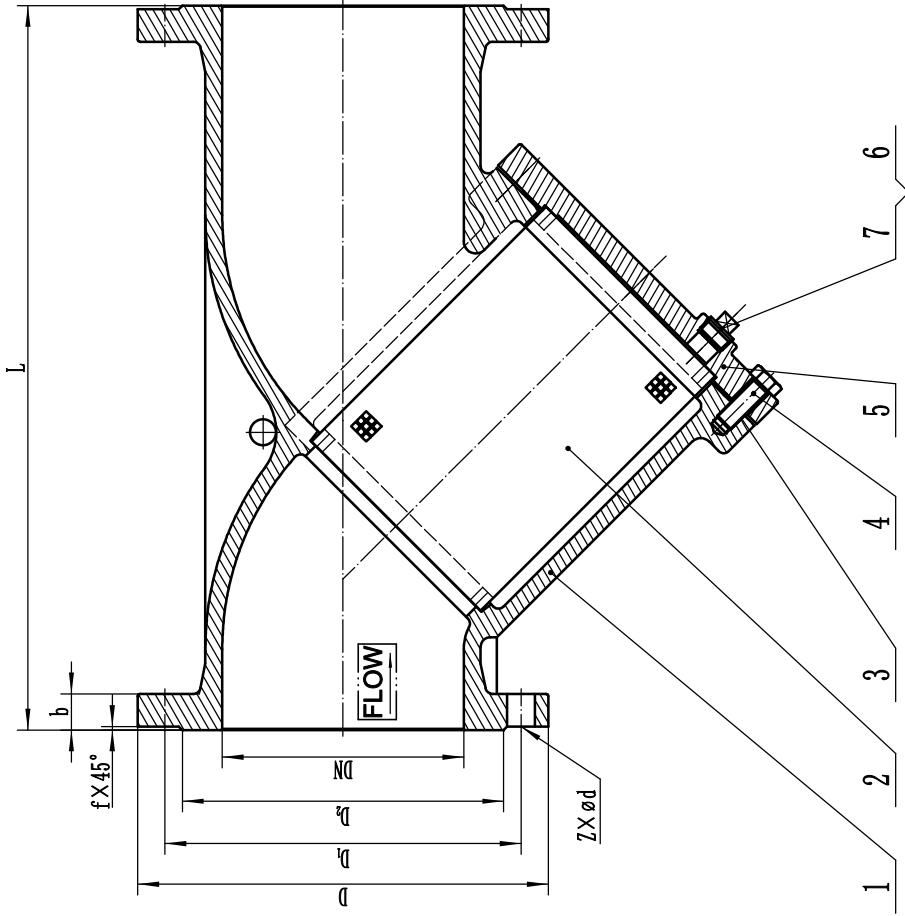

DN	L	D	d	d	b-f	Z-Ød
50	230±2	Ø165	Ø125	Ø99	20-3	4-Ø19
65	290±2	Ø185	Ø145	Ø118	20-3	4-Ø19
80	310±2	Ø200	Ø160	Ø132	22-3	8-Ø19
100	350±2	Ø220	Ø180	Ø156	24-3	8-Ø19
125	400±2	Ø250	Ø210	Ø184	26-3	8-Ø19
150	480±2	Ø285	Ø240	Ø211	26-3	8-Ø23
200	600±2	Ø340	Ø295	Ø266	30-3	12-Ø23
250	730±2	Ø405	Ø355	Ø310	32-3	12-Ø28
300	850±2	Ø460	Ø410	Ø370	32-3	12-Ø28

NO.	CODE	PART	QTY	MATERIAL	REMARK
7		PTFE		PTFE	
6		PLUG		35# STEEL	
5		BONNET		CAST IRON	
4		BOLT		35# STEEL	
3		BONNET GASKET		METAL+FLEXIBLE GRAPHITE	
2		SCREEN		SS201 PLATE+SS304 SCREEN	
1		BODY		CAST/DUCTILE IRON	

YUANDA VALVE GROUP	
CO., LTD.	
DIN STRAINER	
B(DIN) Y ST-16-50~300.00	