


# SPECIFICATION

SIZE	50~200	
PRESSURE	10K	
TEMPERATURE	≤150°C	
TEST PRESSURE MPa	SEAL(WATER)	1.6
	SHELL(WATER)	2.1
	BACK SEAT(WATER)	NA
	LOW PRESSURE SEAL(GAS)	0.4~0.6
MEDIUM	WATER,OIL,GAS AND NITRIC ACID CORROSIVE LIQUID	

## TECHNICAL REQUIREMENT

- 1.DESIGN ACCORDING TO KS B 2361
- 2.TEST ACCORDING TO KS B 2304
- 3.FACE TO FACE TO KS B 2306
- 4.FLANGE END TO KS B 1511

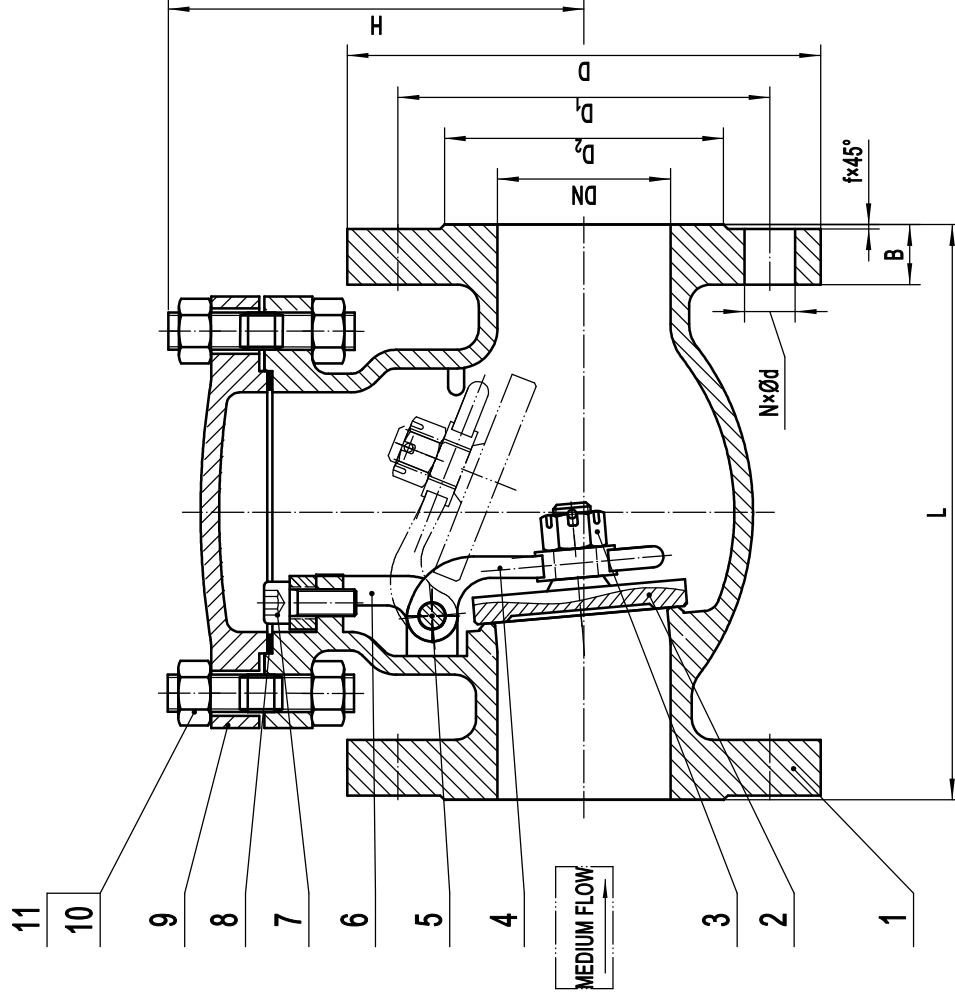

DN	D	D <sub>1</sub>	D <sub>2</sub>	N×Ød	L	B-f	H
DN50	Ø155	Ø120	Ø96	4×Ø19	203±2	16-2	133
DN65	Ø175	Ø140	Ø116	4×Ø19	216±2	18-2	152.5
DN80	Ø185	Ø150	Ø126	8×Ø19	241±2	18-2	161
DN100	Ø210	Ø175	Ø151	8×Ø19	292±2	20-2	211
DN125	Ø250	Ø210	Ø182	8×Ø23	330±2	20-2	232
DN150	Ø280	Ø240	Ø212	8×Ø23	356±2	22-2	254
DN200	Ø330	Ø290	Ø262	8×Ø23	495±2	22-2	294

NO.	NAME	QTY	MATERIAL
11	NUT		STS304
10	STUD BOLT		STS304
9	BONNET		SCS13
8	GASKET		PTFE
7	NAIL		STS304
6	YOKE		SCS13
5	CYLINDRICAL PIN		STS304
4	ARM		SCS13
3	NUT		STS304
2	DISC		SCS13
1	BODY		SCS13

YUANDA VALVE GROUP

CO., LTD

KS SS SWING

CHECK VALVE

YDSCSSBB-10K50~200