
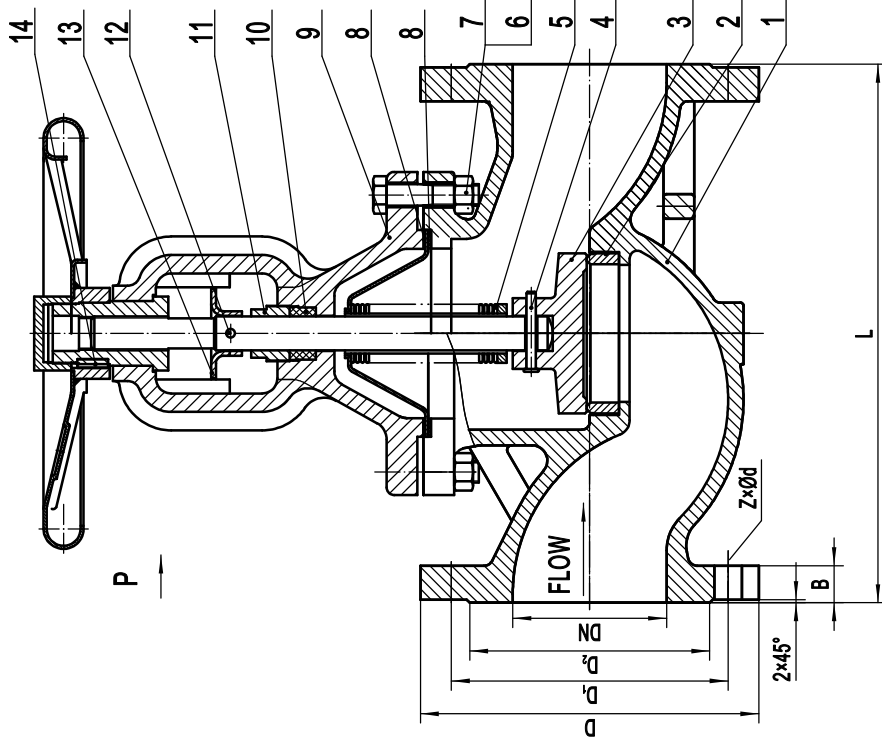


TECHNICAL REQUIREMENT

1. STANDERD ACCORDING TO DIN 3356;
2. FACE TO FACE ACCORDING TO F1 SEIRE OF DIN3202 (FIRST SEIRE OF GB/T12221) ;
3. FLANGE PERFORM THE REGULATION OF BS EN1092-2:1997;
4. PRESSURE TEST SHOULD ACCORDING WITH ISO 5208;

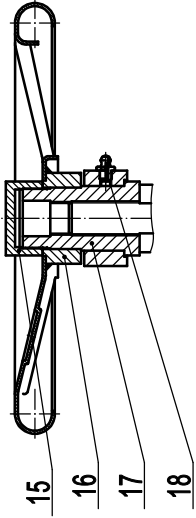

SPECIFICATION

DN	DN15-300	
NORMAL PRESSURE	1.6 MPa	
SUITABLE TEMP	≤200°C	
TEST PRESSURE MPa	SEAL(GAS)	0.6
	SHELL(WATER)	2.4
MEDIUM	BACK SEAL	1
	WATER, STEAM, OIL	

DN	L	D	D ₁	D ₂	B-f	Z*Ød
15	130±2	Ø95	Ø65	Ø46	14-2	4*Ø14
20	150±2	Ø105	Ø75	Ø56	16-2	4*Ø14
25	160±2	Ø115	Ø85	Ø65	16-2	4*Ø14
32	180±2	Ø140	Ø100	Ø76	18-2	4*Ø19
40	200±2	Ø150	Ø110	Ø84	18-2	4*Ø19
50	230±2	Ø165	Ø125	Ø99	20-2	4*Ø19
65	290±2	Ø185	Ø145	Ø118	20-2	4*Ø19
80	310±2	Ø200	Ø160	Ø132	22-2	8*Ø19
100	350±2	Ø220	Ø180	Ø156	24-2	8*Ø19
125	400±2	Ø250	Ø210	Ø184	26-2	8*Ø19
150	480±2	Ø285	Ø240	Ø211	26-2	8*Ø23
200	600±2	Ø340	Ø295	Ø266	30-2	12*Ø23
250	730±3	Ø405	Ø355	Ø319	32-3	12*Ø28
300	850±3	Ø460	Ø410	Ø375	32-3	12*Ø28

8	GASKET				
7	1 STYPE HEX NUT				
6	HEXAGON BOLT				
5	BELLOW PART ASSEMBLY DRAWING				
4	HINGE PIN A STYPE				
3	DISC				
2	BODY SEAL RING				
1	BODY				

NO.	CODE	NAME	QTY	MATERIAL	1 PC TOTAL		NOTE
					WEIGHT		
18		STRAIGHT HYDRAULIC GREASE NIPPLES					
17		STEM NUT		ZCuZn38Mn2Pb2			
16		HANDWHEEL		STEEL			
15		NUT		STEEL			
14		A STYPE FLAT KEY		45#STEEL			
13		STOP PLATE		STEEL			
12		ELASTIC CYLINDRICAL PIN -STRAIGHT FLUTE-HEAVY		45#STEEL			
11		PLUG SCREW		STEEL			
10		PAKING		EXPANDED GRAPHITE			
9		BONNET		GG25/IGGG50			
							YUANDA VALVE GROUP CO.,LTD.
							BELLOW GLOBE VALVE
							DIN BGL16-15-300